

BOBRICK

DESIGN

DURABLE

COMPLIANT

PRIVACY


Privacy Partitions




COMPACT LAMINATE (SOLID PHENOLIC)[†]

MATERIAL DESCRIPTION: MULTIPLE LAYERS OF RESIN-IMPREGNATED KRAFT PAPER WITH COLOR AND CLEAR ULTRA HARD MELAMINE SURFACE SHEETS.


WHITE 949-58
 FROSTY WHITE 1573-60
 ALMOND S-445-CA
 WILLOW GREY S-431-CA

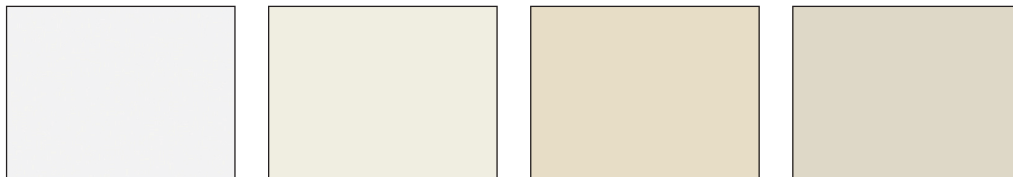


****BRUSHED ALUMINUM 0028 FH**
 GREY GRIT P-886-CA
 PEWTER MESH 4878-60
****SILVRETTA 0229 FH**

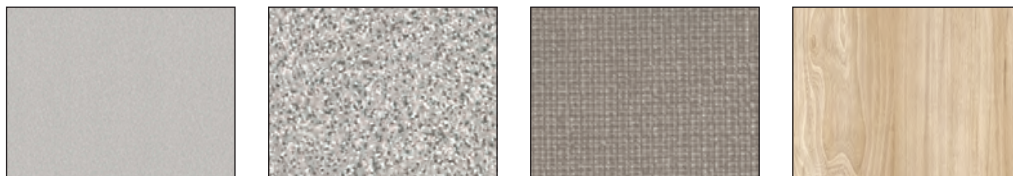


EARTH 5342-58
 EVENING TIGRIS 4674-60
****CELLO 0811 FH**
 LIMOUSINE GREY S-542-CA

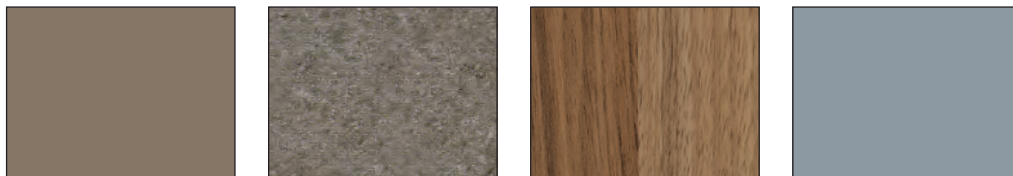

NAVY GRAFIX 7018-58
 CITADEL WARP 5882-58
 GRAPHITE GRAFIX 515-58
****CHARCOAL 0077 FH**

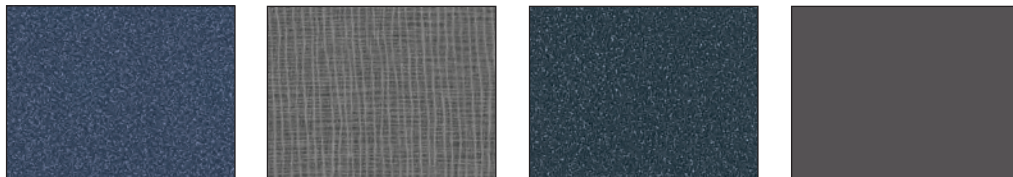

BLACK STONE P-500-CA
****BLACK 0080 FH**

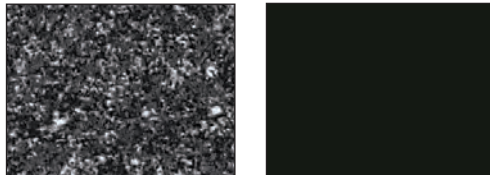

ARBORITE™

Wilsonart

TRESPA
(SCRC)

FUNDERMAX

**10-DAY RAPID[‡]RESPONSE PROGRAM.[‡]**

- 25 COMPARTMENTS OR LESS • SHIP WITHIN 10 DAYS OR LESS AFTER ORDER APPROVAL AT NO EXTRA CHARGE
- ALL STANDARD COLORS • HUNDREDS OF OTHER COLORS ARE AVAILABLE IN COMPACT LAMINATE; ADDITIONAL LEAD TIME WILL APPLY, PLEASE CONSULT ARBORITE, FORMICA, TRESPA, WILSONART OR FUNDERMAX FOR COLOR OPTIONS

COLORS ARE PRINTED REPRODUCTION AND ARE FOR DESCRIPTIVE PURPOSES ONLY. REFER TO MANUFACTURERS' SAMPLES FOR ABSOLUTE COLOR FIDELITY. COLOR GUIDES AND SAMPLES ARE AVAILABLE FROM BOBRICK ON REQUEST.


* SCRC MINOR EDGE NICKS AND RANDOM COLOR VARIATIONS ARE NORMAL CONSEQUENCES OF MANUFACTURING MATERIAL CONTAINING NATURAL FIBERS. MATERIAL CAN VARY IN COLOR BETWEEN THICKNESSES AND PRODUCTION BATCHES. WHERE COLOR CONSISTENCY IS CRITICAL, COMPACT LAMINATE 1080 DURALINE SERIES IS RECOMMENDED. DISCOLORATION OF THE EDGES MAY OCCUR IN ENVIRONMENTS WITH SIGNIFICANT LIGHT EXPOSURE.

** FUNDERMAX COLORS CAN BE USED TO MANUFACTURE A ONE PIECE 72" X 72" PANEL AND MEET CLASS A FIRE RATING

† ALL COLORS ARE AVAILABLE IN MATTE FINISH. REFER TO MANUFACTURERS FOR SAMPLES OF OTHER COMPACT LAMINATE PRODUCTS.

‡ 10-DAY PROGRAM EXCLUDES CLASS A FIRE-RATED 1180 SERIES, GAP-FREE, AND MAXIMUM-HEIGHT PRIVACY OPTIONS.



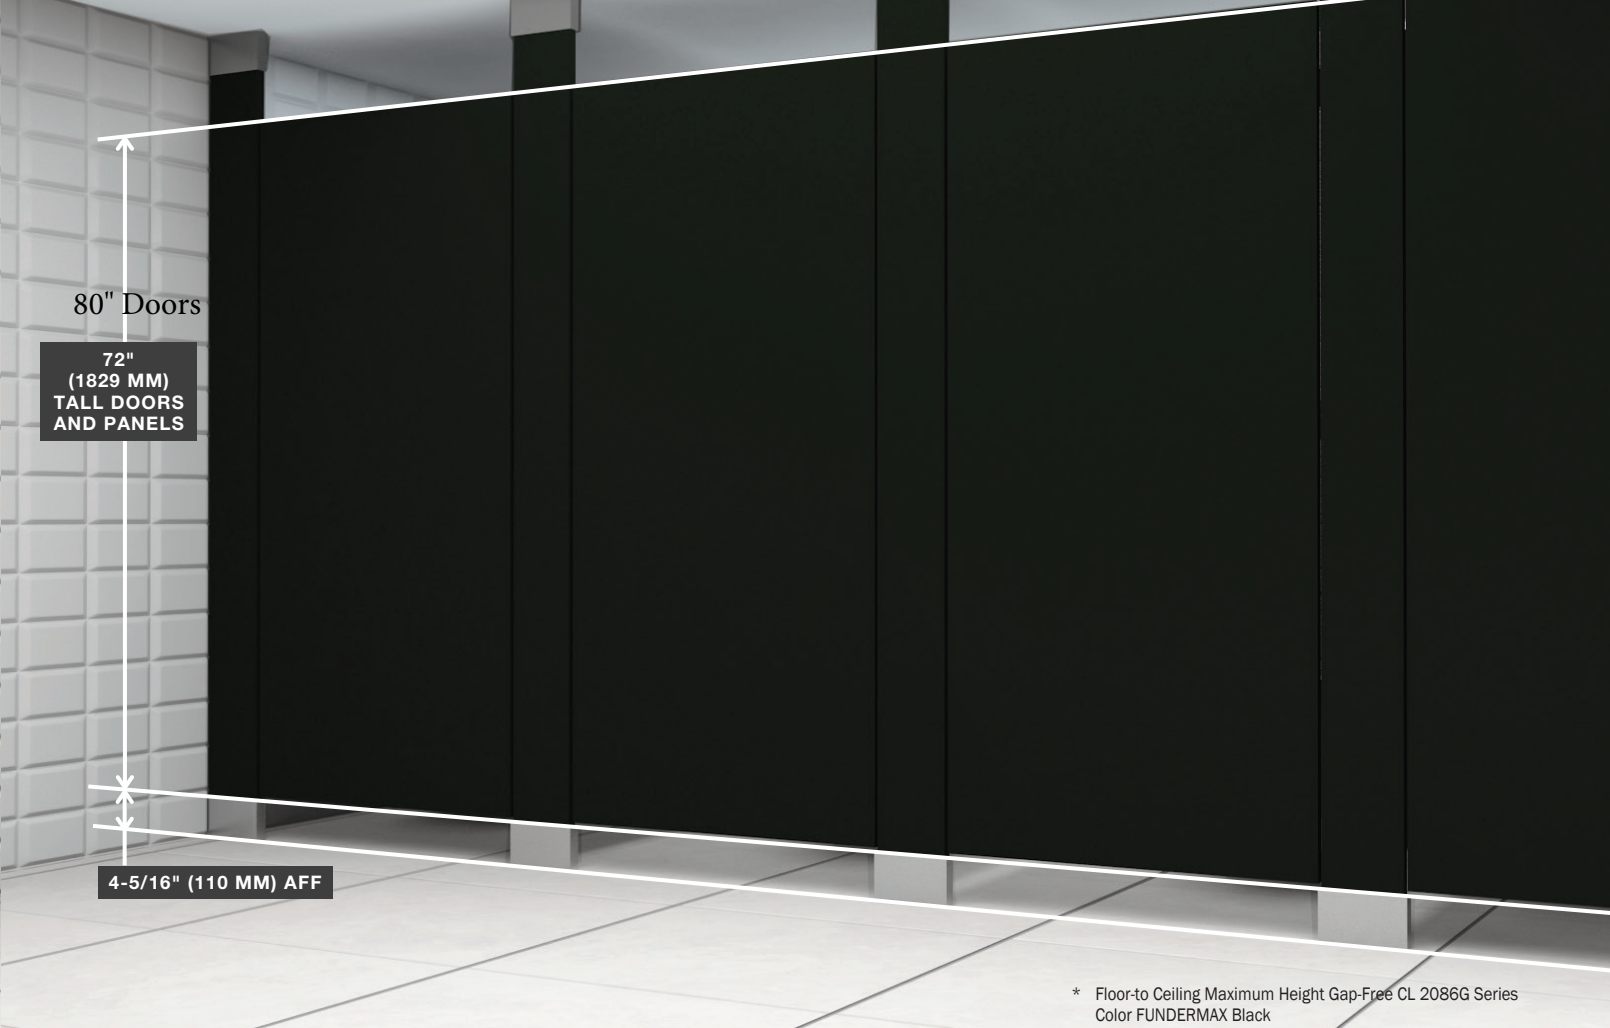

* Floor-to Ceiling Maximum Height Gap-Free CL 2086G Series
Color FUNDERMAX Black

MAXIMUM HEIGHT WITH GAP-FREE PRIVACY CL (PHENOLIC) / SCRC



Available in Compact Laminate (CL phenolic) and Solid Core Reinforced Composite (SCRC). Both offer excellent durability and ease of cleaning.

Door Gap Dimensions

Routed interlocking doors and stiles
allow for edge overlap
for no sightlines

Height Dimensions

Door & Panel Height: 72"

Floor Clearance: 4-5/16"

*Designers Note: Custom Heights available


| SERIES | MATERIALS | OPTIONS |
|----------------|---|--|
| DuraLine 2080G | 3/4"doors and stiles with 1/2" panels; Solid Compact Laminate (CL Phenolic) with black core | Class A fire-rated (2180G) Occupancy Indicator Continuous Panel Bracket (.67P) |
| Sierra 2090G | 3/4"doors and stiles with 1/2" panels; Solid Core Reinforce Composite (SCRC) color-through | Occupancy Indicator Continuous Panel Bracket (.67P) |





* Overhead-Braced Maximum Height HPL 2042 Series
Color Wilsonart Wheat Strand

MAXIMUM HEIGHT HPL



Available in 35 stocked and readily available colors and patterns designed to meet every budget need, High Pressure Laminate is an excellent material choice in the restroom.

Door Gap Dimensions

Hinge side: 3/32" Max
Keeping side: 7/64" Max

Height Dimensions

Door & Panel Height: 72"
Floor Clearance: 4-5/16"

*Designers Note: Custom Heights available

| SERIES | MATERIALS | OPTIONS |
|-------------------|---|---|
| Designer HPL 2040 | 1" doors, stiles and panels; High-Pressure Laminated with a 45 lb density, industrial grade, particle board substrate | Stainless Steel Edge Trim available as 2030 series; Occupancy Indicator Latch Continuous Panel Bracket (.65P) |





NO PEEKING. **JUST PRIVACY.**



Gap-free interlock & max height toilet partitions



PRIVACY IS BECOMING A NECESSITY

Current trends in the restroom are causing designers to rethink the material selection and design of toilet partitions. Designers are looking beyond the neutral color choices in typical partitions and considering bold colors and woodgrain patterns. Across demographics, restroom privacy is also increasingly recognized as a necessity.

Gaps in the toilet partition are no longer satisfactory. This issue is typical of pre-fabricated partitions installed in many restrooms today. While these partitions are popular due to their lower cost and higher availability, they lack in the privacy afforded to restroom patrons.


All Bobrick partitions are made-to-order and available in a range of materials. Our Portfolio of Values reflects what is important in today's restroom: design, durability, compliance and privacy.

COMMON CONCERNS

- Gaps between doors and stiles found on typical toilet partitions.
- Door latch bolts that do not lock all the way causing doors to open unintentionally.
- Standard 12" floor clearances on partition doors are too high.

BOBRICK

BOBRICK PRIVACY SOLUTIONS



TIGHTER GAPS

Bobrick made-to-order partitions allow for tighter gaps compared to industry standard.




GAP-FREE OPTION

Available on CL Phenolic or SCRC, our Gap-Free option provides no sightlines between doors and stiles.



MAX HEIGHT OPTION

Doors and Panels available in 72" standard privacy height with 4-5/16" floor clearance. Custom heights also available.




CONTINUOUS BRACKETS

Bobrick continuous panel bracket option allows for no line of sight at the panel connections.



STAINLESS STEEL HARDWARE

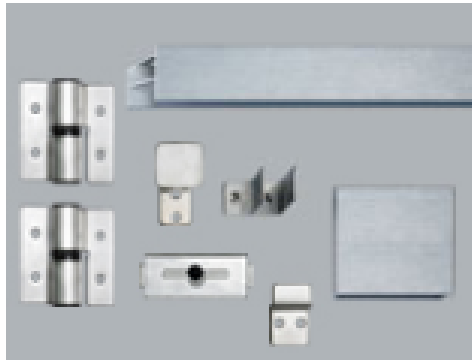


Standard Concealed Stainless Steel (1080/1180)

- Heavy-gauge type 304 stainless steel
- Hinges adjust for partial opening or self-closing
- Slide latch with keeper
- Clothes hook
- Emergency access inswing doors



Optional Full-Height Stainless Steel (1080/1180)

- Heavy-gauge type 304 stainless steel
- Self-closing hinge runs full height
- Full-height angle bracket and U-channels
- Reinforced latch, keeper
- Emergency access inswing doors
- Add suffix .67 to 1080/1180 Series Number

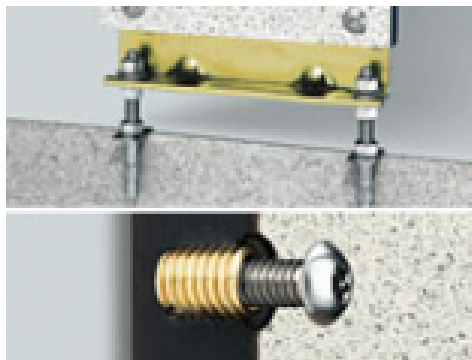

Standard Stile Base Leveling Device (1080/1180)

- 7-gauge bar factory-installed to stile
- 3/8" (10mm) dia. stainless wedge floor anchors
- Patented 1-piece shoe conceals leveling device

Standard Factory-Installed Inserts (1080/1180)

- Metal-to-metal contact for securing hardware
- Withstand 1500 lbs (6672 N) pull-out force
- Vandal-resistant Pin-in-Head Torx Screws